



MP-1055 Model Plank®

Technical Data Sheet

DENSITY 41 lbs/ft³ (0.66g/cc)

HARDNESS 60 SHORE D

MASTERS - PATTERNS - PROTOTYPES

DESCRIPTION

Machinable board designed for production of patterns, mock-ups, prototypes and masters by milling or machining by hand. Additional applications manufacture of molds for low pressure reaction injection molding, vacuum forming molds for lower number of pieces

PROPERTIES

- Dense fine surface
- Easy to seal and good to varnish
- Low dust formation when milled
- Easy machinability
- Very high dimensional stability
- Good compressive strength and edge stability
- Good heat distortion temperature

PHYSICAL PROPERTIES			
Color			brown
Density at 74°F (23°C)	ASTM D 792-91	lbs/ft ³ (g/cc)	41 (0.66)
MECHANICAL PROPERTIES at 23°C			
Hardness (77°F/150°F: 25°C/66°C)	ASTM D 2240	Shore D1	60/50
Flexural strength	ASTM D 790-95a	psi (MPa)	3,618 (25)
Flexural modulus	ASTM D 790-95a	psi (MPa)	209,540 (1,445)
Tensile strength	ASTM D 638-95	psi (MPa)	2,910 (20)
Elongation	ASTM D 638-95	%	1.4
Compressive strength	ASTM D 695-91	psi (MPa)	4,054 (28)
Unnotched Izod Impact (complete break)	ASTM D 256-93	ft.Lbf/in (J/m)	1.21 (64.6)
Heat deflection temperature @264 psi	ASTM D 648-82	°F (°C)	140 (60)
Coefficient of thermal expansion (CTE)	TMA	10 ⁻⁶ .°F ⁻¹ (°C)	34 (62)
STABILITY OF MP-1055 MODEL PLANK®			
Condition	Weight(g)	Length(mm)	
Initial (2" x 4" x 4" pieces)	368.38	105.44	
After 24 hours at -30°F	368.62	105.20	
After 24 hours at standard lab conditions	368.38	105.44	
After 6 hours at 130°F	368.33	105.63	
After 24 hours at standard lab conditions	368.37	105.44	
After 168 hours at 100°F/100% Relative Humidity	369.62	105.53	
After 24 hours at standard lab conditions	368.93	105.43	
Additional 24 hours at standard lab conditions	368.89	105.46	

ASSEMBLY / FINISH

Ambient Use Adhesive System - TCC230 Epoxy Adhesive with TCC-102 or TCC-104 Hardeners
Patch Paste - P-34 Model Plank Filler with White Cream Hardener

SikaAxson US +1 248 588 2270 axsonmh@axson.com sikaaxson.us	CHINA +86 21 58 68 30 37 marketing.china@axson.com MEXICO +52 55 52 64 49 22 marketing@axson.com.mx	GERMANY +49 (0) 7125 940 492 tooling@de.sika.com	INDIA +91 20 25 56 07 10-11 info.india@axson.com SLOVAKIA +42 1 76 42 25 26 axson.sk@axson.com	ITALY +39 02 96 70 23 36 axson@axson.it SPAIN +34 9 32 25 16 20 spain@axson.com	JAPAN +81 5 64 26 25 91 sales.japan@axson.com U.K. +44 16 38 66 00 62 sales.uk@axson.com	FRANCE Global Headquarters +33 1 34 40 34 60 axson@axson.com axson-technologies.com
--	---	--	---	---	--	--



MP-1055 Model Plank®


Technical Data Sheet

DENSITY 41 lbs/ft³ (0.66g/cc)


HARDNESS 60 SHORE D

MASTERS - PATTERNS - PROTOTYPES

Machining Recommendations

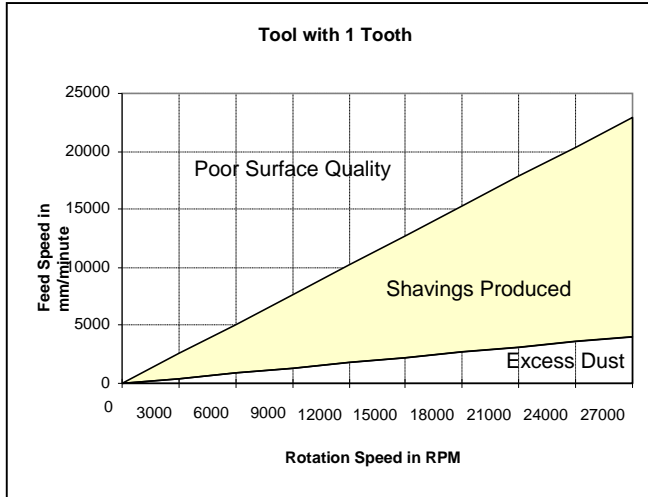

Metric Machining Envelope

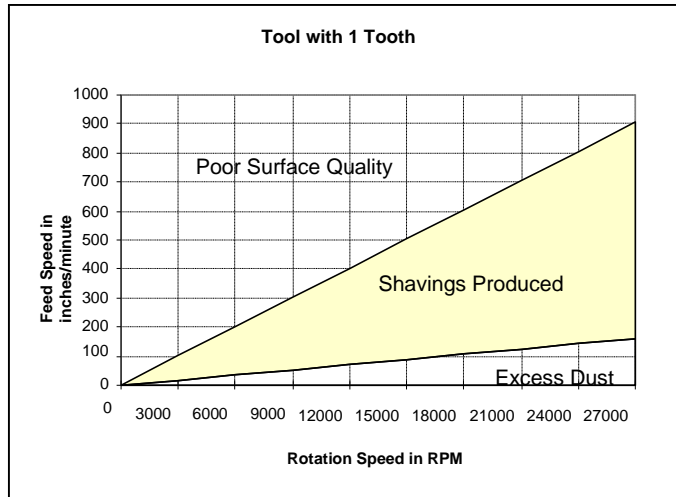

English Machining Envelope

Machining Parameters

	Cutter edge velocity (Vc in ft/min (m/min))	Feed per tooth (fz in inches (mm)/revolution)
Rough shape	328 -1640 (100 to 500)	0.006 – 0.028 (0.15 to 0.70)
Finish	1312 – 2625 (400 to 800)	0.003 – 0.004 (0.07 to 0.10)

$$n = ((12 \text{ English or } 1000 \text{ metric}) \times Vc) / (\pi \times Dc)$$

$$Vf = n \times fz \times Z$$

- Vc: Cutter edge velocity in ft/min (m/minute)
- Dc: Cutting diameter in inches (mm)
- n: Spindle speed in revolution/minute
- fz: Feed per tooth in inches (mm)/revolution
- Z: Number of teeth
- Vf: Feed speed in inches (mm)/minute

These are possible recommendations. There may be some variance depending on cutters and CNC mill capabilities.

CUTTING SUGGESTIONS FOR TOOLING PLANKS

CUTTING HORIZONTALLY ON A PLANER MILL: Head is a 10 insert, 8" in diameter. For best results use 5 inserts. Inserts are SFE-42E-10J-C5. We have found a C2 Carbide insert does not chip as easily. RPM 2200-2400 – table feed 50-55 inches per minute. Some modifications may be needed.

SAW BLADES: A carbide-tipped, positive rake saw blade with air slots should be used, if possible. We suggest alternate top bevel ATB or triple chip grind TCG rpm, depending on the saw. We suggest 3,500 max rpm. Check with manufacturer on saw and blade size.

- 12" blade, 48 teeth
- 16" blade, 48 teeth
- 18" blade, 60 teeth

When sawing, you may need to back part away from blade to relieve heat and binding, then proceed with cut. It may be necessary to take more than one cut to achieve best finish.

SikaAxson US +1 248 588 2270 axsonmh@axson.com sikaaxson.us	CHINA +86 21 58 68 30 37 marketing.china@axson.com MEXICO +52 55 52 64 49 22 marketing@axson.com.mx	GERMANY +49 (0) 7125 940 492 tooling@de.sika.com	INDIA +91 20 25 56 07 10-11 info.india@axson.com SLOVAKIA +42 1 76 42 25 26 axson.sk@axson.com	ITALY +39 02 96 70 23 36 axson@axson.it SPAIN +34 9 32 25 16 20 spain@axson.com	JAPAN +81 5 64 26 25 91 sales.japan@axson.com U.K. +44 16 38 66 00 62 sales.uk@axson.com	FRANCE Global Headquarters +33 1 34 40 34 60 axson@axson.com axson-technologies.com
---	--	---	---	--	---	---



MP-1055 Model Plank®

Technical Data Sheet

DENSITY 41 lbs/ft³ (0.66g/cc)

HARDNESS 60 SHORE D

MASTERS - PATTERNS - PROTOTYPES

STORAGE CONDITIONS

- Store flat in a dry place. Allow time for material to come to ambient temperature prior to bonding or machining.

HANDLING PRECAUTIONS

Normal health and safety precautions should be observed when handling these products:

- Ensure good ventilation to prevent dust or chip accumulation
- Wear gloves, and safety glasses.
- Do not smoke when machining.

For further information, please consult the material safety data sheet.

GUARANTEE

The information contained in this technical data sheet results from research and tests conducted in our laboratories under precise conditions. Seller cannot anticipate all conditions under which seller's products, or the products of other manufacturers in combination with seller's products, may be used. It is the responsibility of the user to determine the suitability of the SikaAxson's products, under their own conditions, before commencing with the proposed application. In no event shall SikaAxson US be liable for any direct, indirect, punitive, incidental, special, and/or consequential damages, to property or life, whatsoever arising out of or connected with the use or misuse of our products.

<p>SikaAxson US +1 248 588 2270 axsonmh@axson.com sikaaxson.us</p>	<p>CHINA +86 21 58 68 30 37 marketing.china@axson.com</p> <p>MEXICO +52 55 52 64 49 22 marketing@axson.com.mx</p>	<p>GERMANY +49 (0) 7125 940 492 tooling@de.sika.com</p>	<p>INDIA +91 20 25 56 07 10-11 info.india@axson.com</p> <p>SLOVAKIA +42 1 76 42 25 26 axson.sk@axson.com</p>	<p>ITALY +39 02 96 70 23 36 axson@axson.it</p> <p>SPAIN +34 9 32 25 16 20 spain@axson.com</p>	<p>JAPAN +81 5 64 26 25 91 sales.japan@axson.com</p> <p>U.K. +44 16 38 66 00 62 sales.uk@axson.com</p>	<p>FRANCE Global Headquarters +33 1 34 40 34 60 axson@axson.com axson-technologies.com</p>
---	---	--	--	---	--	---